



# Interior Flooring


## Interior 1

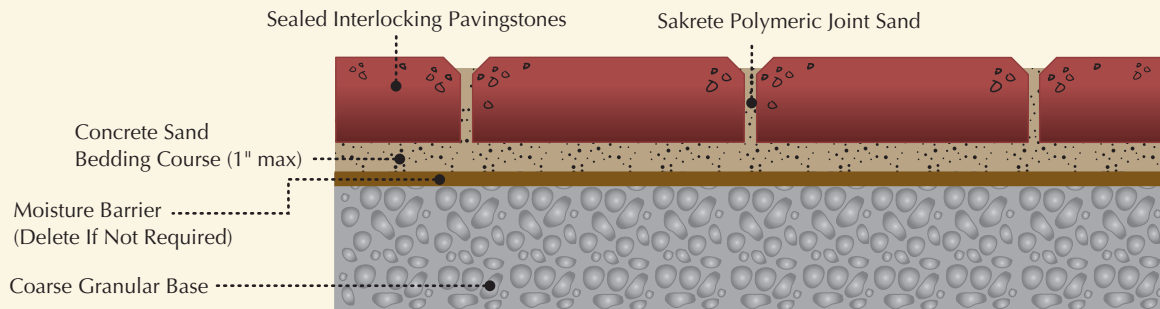

## Interior 2

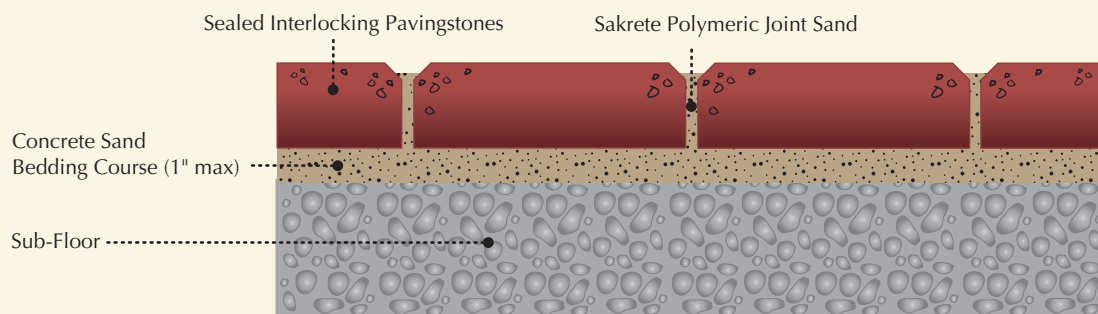

## Interior 3

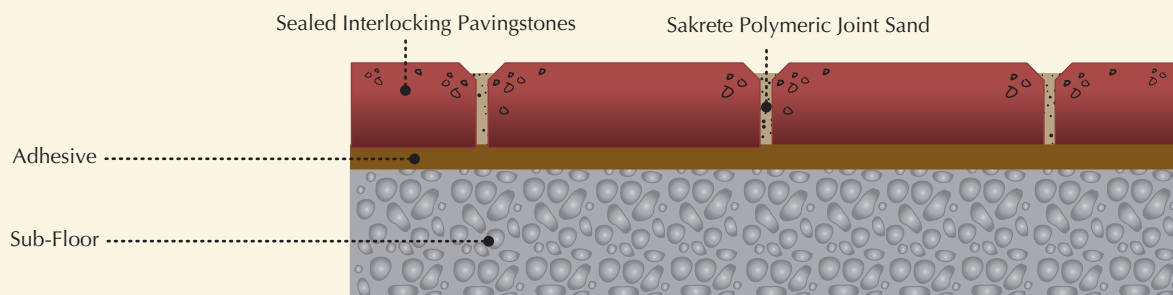

### Notes:

A sealer should be used on the floor to hold the Concrete sand in joints. Once this is accomplished, the floor can be maintained just as a tile floor.