



See back for
**SPECIFICATION
DETAILS**

SLAB SERIES™ PAVER


[Great Hardscapes Start Here®]

SLAB SERIES™


SIMPLE AND VERSATILE.

The possibilities are endless for this smooth or textured, clean-lined paver. Use them individually as stepping stones or combine them to create continuous surfaces such as patios or pathways.


COLOURS

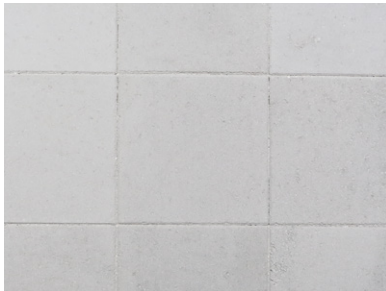

Natural

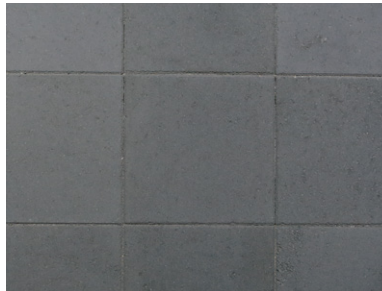


Charcoal

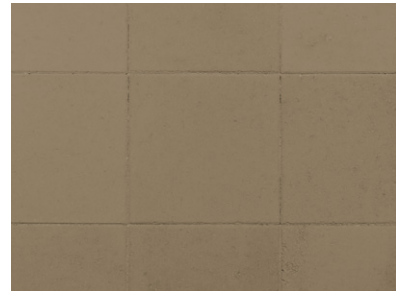

Desert

SPECIFICATIONS

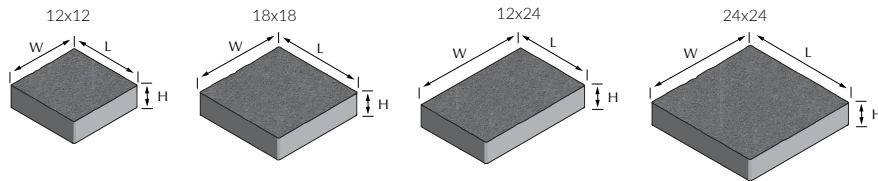

NAME	TEXTURE	METRIC DIMENSIONS	IMPERIAL DIMENSIONS	WEIGHT	APPLICATIONS		
12x12 Natural	Smooth	303mm W x 303mm L x 45mm H	11.93" W x 11.93" L x 1.77" H	10 kg	X		
18x18 Natural	Smooth	455mm W x 455mm L x 45mm H	17.91" W x 17.91" L x 1.77" H	23 kg	X		
18x18 Charcoal	Smooth	455mm W x 455mm L x 45mm H	17.91" W x 17.91" L x 1.77" H	23 kg	X		
12x24 Natural	Smooth	303mm W x 608mm L x 50mm H	11.93" W x 23.94" L x 1.97" H	20.25kg	X		
12x24 Charcoal	Smooth	303mm W x 608mm L x 50mm H	11.93" W x 23.94" L x 1.97" H	20.25kg	X		
24x24 Natural	Smooth, Slate or Washed	608mm W x 608mm L x 50mm H	23.94" W x 23.94" L x 1.97" H	40.5 kg	X		
24x24 Charcoal, Desert	Smooth	608mm W x 608mm L x 50mm H	23.94" W x 23.94" L x 1.97" H	40.5 kg	X		

For design consideration add 2mm or .07" to the W and L dimensions to allow for the spacers.



PEDESTRIAN
Indicates product is suitable for projects with pedestrian use.



LIGHT-DUTY VEHICULAR
Indicates product is suitable for projects with light-duty vehicular use.



HEAVY-DUTY VEHICULAR
Indicates product is suitable for projects with commercial or heavy-duty vehicular use.

COMPRESSIVE STRENGTH: 55 MPa (8000 PSI)

DIMENSIONAL TOLERANCES: Meets specification CSA A231.1-19 / ASTM C1782-20

FLEXURAL STRENGTH: Meets specification CSA A231.1-19 / ASTM C1782 / C1782M-20

The average flexural strength (modulus of rupture) of Basalite Concrete Paving Slab meets/exceeds 5MPa (725 Psi) when tested in accordance to CSA A231.1-19 / ASTM C1782-20 standards.

ABSORPTION: Meets specification CSA A231.1-19 / ASTM C1782-20

The printed colours shown in this brochure may vary from actual product colours. We recommend selecting colours from actual product samples. Please contact your local dealer for more information.

basalite.ca

©2021 Basalite® Concrete Products, LLC. All trademarks ® are registered trademarks.

follow us

